



Flue Liner > Multifuel Liner - 904 & 316

We sell 2 varieties of multi-fuel liner:

- Multifuel 904 - for smokeless fuels
- Multifuel 316 - for wood fuels

Flue Factory Multifuel liner is a flexible twin-skinned stainless steel flue lining with a smooth inner wall. The system has been designed to upgrade existing chimneys which have failed, or for use where the performance is not adequate for modern conditions.

Flue Factory Multifuel liner is classified as a Class ONE flue liner and is suitable for gas, oil and multi-fuel, including wood burning appliances where the maximum flue gas temperature does not exceed 500°C. Manufactured in two skins of either 316 grade or 904 grade austenitic stainless steel, with a range of accessories and is available in 5 diameters.

It can also be used on condensing appliances.

Approvals »



Flue Factory Multifuel liner has been approved and tested to **BS EN 1856-4-2006**.

It is manufactured under an **ISO 9001:2000** Quality system.


Design »

Flue Factory Multifuel liner is manufactured using a single strip of raw material, this is rolled, seamed and manipulated in such a way that it forms both the outer corrugated durable case and an extremely smooth inner bore. The product has 2 convolutions between each seam.

The product is marked with BS EN1856-2 designation number and directional gas flow on every metre.

Flue Factory multifuel liner jointing system is shown here. With a knurled seam and two convolutions between each seam, provides it with excellent cross sectional strength & gives it great flexibility.


Flue Factory Multifuel liner has a high resistance to

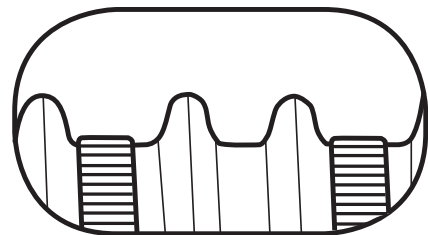

damage, and is virtually impossible to unwind and can withstand prolonged high temperatures without distortion.

Specification »

The maximum bending radius of all flue factory flexible liners is 3 x diameter.



100mm – 300mm
125mm – 375mm
150mm – 450mm
180mm – 540mm
200mm – 600mm

